



# **ABOUT US**

VinylTechLab brand was established in 2016 and was one of the first brands in Central & Eastern Europe to offer multi-layer rigid vinyl flooring solutions. At VinylTechLab we focus on two main product categories that are constantly evolving in order to exceed customers' expectations. Multi-layer rigid vinyl flooring with click Glue down luxury vinyl flooring.

In recent years, with the growing popularity of modern flooring solutions, the company has experienced very dynamic growth.

Currently, VinylTechLab belongs to the portfolio of brands managed by Epuflooring. It manufactures and distributes decorative flooring and wall systems for residential and commercial spaces, as well as finishes for industrial surfaces. Epuflooring belongs to the Epufloor group – a global supplier of sports, recreational and industrial flooring.



RESIDENTAL & COMMERCIAL USE STURDY

DO-IT-YOURSELF CLICK INSTALLATION



HEAVY DUTY USE

FLEXIBLE

PROFESSIONAL GLUE DOWN INSTALLATION

Rigid vinyl

Luxury vinyl



### Unique know-how

- Extensive experience in the flooring sector
- A team of highly skilled professionals
- Over 2,000 completed projects worldwide within the Epufloor group.
- One of the first companies to promote multi-layer (core) vinyl flooring in the Central and Eastern Europe region.

### You can be at peace

All vinyl flooring solutions under VinylTechLab brand come with the warranty. More details about the warranty conditions can be found in the relevant documents.



#### Residental

Apartment House Serviced Apartment



25-Year Guarantee



### Commercial use

Hotel & Spa Restaurant Retail Shop Office Building Fitness Facility School Kindergarten



10-Year Guarantee



#### Industrial use

Small storage rooms
Electronic equipment production line



5-Year Guarantee

# NATURAL QUIET RESLIENT

# MODERN VINYL FLOORING

# WHY US?



### Water resistant

#### No swan is afraid of water



Our multi-layer rigid click vinyl flooring features EpuCore, which is a patented, 100% water-resistant composite base. You can easily merge spaces and install the same flooring solution in both dry and wet areas. Have a deep dive into your bathtub and make a huge splash!

# Naturally beautiful

Trendy & realistic design



Thanks to the innovative printing and embossing technology, we unlock the diverse world of unlimited designs. Pick your favourite décor - from natural wood looks to trendy stone and concrete patterns.

### Quiet & warm

Enjoy the silence



It is all about comfort. Our multi-layer rigid click vinyl flooring comes with the pre-attached, high-density foam underlay. It gives superior acoustic qualities and comfortable underfoot.

### Durable & resilient

New limits of endurance




Sturdy EpuCore composite base and cutting-edge EpuShield coating make our multi-layer rigid click vinyl flooring extremely strong and stable, as well as resistant to shocks, indentations and stains.



# COLLECTIONS

XL Plank

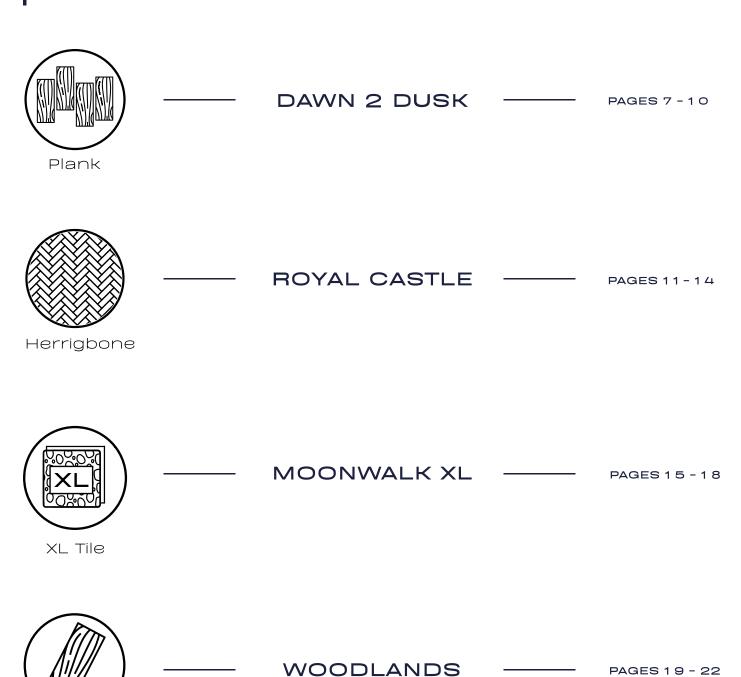



## DAWN 2 DUSK



viñyl

6 mm



0,55 mm



180 x 1220 mm





A strong and reliable mounting system based on angled panel clips. To ensure complete stability, the boards should be laid in rows.





Soft underfoot and acoustic insulation up to ΔLw 21 dB.











Matt finish

Box:

10 planks / 2.20 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.





2,5 mm



0,55 mm



188 x 1228 mm



The enhanced durability resulting from adhesive installation makes them one of the most popular flooring solutions in commercial spaces.







installation





Installing luxury vinyl flooring with adhesive is not an easy task. It is recommended to use certified installers.



Matt finish











16 planks / 1.25 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.





**SEPIA** EAN: 5902808111191



**WHEAT WHEAT GD**EAN: 5902808111214 EAN: 5902808111375



 HAZELNUT
 HAZELNUT GD

 EAN: 5902808111160
 EAN: 5902808111382



**LINEN** EAN: 5902808111184



**LATTE LATTE GD**EAN: 5902808111177
EAN: 5902808111405



**COCOA** EAN: 5902808111498



**CINNAMON** EAN: 5902808111535



AMBER AMBER GD EAN: 5902808111122 EAN: 5902808111399



**SAFFRON** EAN: 5902808111481



**FROST** EAN: 5902808111153



# ROYAL CASTLE





6 mm



0,55 mm



125 x 625 mm





Click Installation



One-piece installation technology a locking element integrated into the core. Tapping with a soft mallet then ensures a secure connection.





Integrated underlay

Soft underfoot and acoustic insulation up to ΔLw 21 dB.











16 planks / 1.25 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.







2,5 mm



0,55 mm



132 x 660 mm



Glue down installation The enhanced durability resulting from adhesive installation makes

them one of the most popular flooring solutions in commercial spaces.



Embossed-in-register technology








Installing luxury vinyl flooring with adhesive is not an easy task. It is recommended to use certified installers.















18 planks / 1.57 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.





**BALMORAL** EAN: 5902808111221LV

**BALMORAL GD** EAN: 5902808111337



**BRAN** EAN: 5902808111238



**DUCALE** EAN: 5902808111252

**DUCALE GD** EAN: 5902808111412



**DEL MONTE**EAN: 5902808111542



**GLAMIS** EAN: 5902808111269





**ROCHESTER** EAN: 5902808111283

**ROCHESTER GD** EAN: 5902808111429



**LOUVRE** EAN: 5902808111443



**ALCAZAR** EAN: 5902808111450



**ALHAMBRA** EAN: 5902808111436



# MOONWALK XL





7 mm



0,55 mm



609 x 609 mm





Click Installation



Based on a single action installation method suitable for all types and widths of floor products. It's fair to say that this really is the first locking system that truly makes floor installations fast, easy and enjoyable for everyone - professional or DIY.





Integrated underlay

Soft underfoot and acoustic insulation up to ΔLw 21 dB.









Box: 5 tiles / 1.85 m<sup>2</sup> and 4 tiles / 1.77 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.







**LUNAR** EAN: 5902808110644



**CRATER**EAN: 5902808110651





# WOODLANDS



7 mm



0,55 mm



228 x 1828 mm





Click Installation



Based on a single action installation method suitable for all types and widths of floor products. It's fair to say that this really is the first locking system that truly makes floor installations fast, easy and enjoyable for everyone - professional





Soft underfoot and acoustic insulation up to ΔLw 19 dB.







25-Year warranty







5 planks / 2.08 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.



vinyl



2,5 mm



0,55 mm



235 x 1524 mm



Glue down installation



The enhanced durability resulting from adhesive installation makes them one of the most popular flooring solutions in commercial spaces.



Embossed-in-register technology







Installing luxury vinyl flooring with adhesive is not an easy task. It is recommended to use certified installers.















Matt finish

10 planks / 3,58 m<sup>2</sup>. We use eco-friendly boxes made from recycled paper. Please recycle them after use.





**IVORY** EAN: 5902808110729



**MADEIRA** EAN: 5902808110743



**COPPER** EAN: 5902808110767



**ALMOND ALMOND GD** EAN: 5902808110736 EAN: 5902808111351




 SIENNA
 SIENNA GD

 EAN: 5902808110750
 EAN: 5902808111368



**RUSSET** EAN: 5902808110774

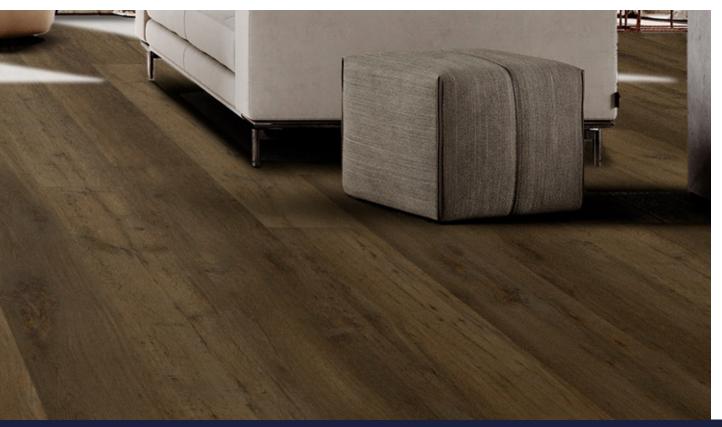

# AVAILABLE DECORS



Click Installation



Glue down installation

Wheat GD



DAWN 2 DUSK

Sepia Cocoa Wheat Cinnamon Hazelnut Amber Linen

Innamon
Hazelnut GD
Amber Amber GD
Linen
Saffron

Latte GD Frost



ROYAL CASTLE

Balmoral Bran Ducale Del Monte Glamis Pena Rochester Louvre Alcazar

Pena GD Rochester GD

Balmoral GD

Ducale GD



MOONWALK XL

Lunar Crater

Alhambra



XL Plank

WOODLANDS


Ivory
Almond
Madeira
Sienna
Copper
Russet

Almond GD

Sienna GD

Please note that all images in this catalog are for illustrative purposes only and may not fully reflect the actual product due to printing variations. We recommend visiting your nearest showroom to experience the product firsthand.

### PRODUCT INFORMATION




- 1. Pre-attached sound-absorbing IXPE underlay
- 2. EpuCore patented composite base with click system
- 3. High-resolution decorative film
- 4. Transparent wear layer
- 5. EpuShield anti-scratch matte coating

**EpuCore is a patented SPC (stone polymer composite)** base made from stone and innovative polymers. There are many different options of vinyl planks available on the market, all with different properties. The main advantage of EpuCore is its balanced formula. Multi-layer rigid vinyl flooring from Vinyl Tech Lab is sturdy, not too heavy, and maintains a certain amount of elasticity. **Such construction guarantees high impact resistance, superior dimension stability, and easy installation.** 

Another key feature of Vinyl Tech Lab multi-layer rigid vinyl flooring is also its thickness. Thanks to the EpuCore formula, planks and tiles from Vinyl Tech Lab are thicker. And thicker planks and tiles mean deeper and stronger click profile.





- 1. Dimensionally stable base material
- 2. Glass fibre reinforcement layer
- 3. High-resolution decorative film
- 4. Transparent wear layer

Luxury glue down vinyl flooring has been an integral part of the broad category of flexible floor coverings for two decades. The enhanced durability resulting from adhesive installation makes it one of the most popular flooring solutions in commercial spaces such as offices, hotels and shops.

Another extremely important aspect is the construction and quality of the base material. VinylTechLab luxury vinyl flooring is made of bonded polymer layers. All layers form a uniform whole and give the base material high dimensional stability. VinylTechLab vinyl panels are finished with an EpuShield coating. EpuShield is a special polyurethane coating that covers the wear layer and acts as a first line of defence. This coating is antibacterial, non-slip and protects against staining.

EpuShield is also characterised by lower hardness than other traditional coatings with ceramic particles, which improves its scratch resistance.

Equally important is the visual effect, which is in line with current trends. Thanks to the EpuShield coating, all VinylTechLab vinyl panels have an authentic matt appearance. Environmental aspects are also worth noting. The production process uses recycled materials, which reduces the consumption of raw materials while maintaining high product quality. VinylTechLab vinyl panels are free of harmful substances, including harmful plasticisers and phthalates, which is confirmed by, among others, the Floorscore certificate.

# RIGID VINYL

#### PRODUCT SPECIFICATION

Floor type	multi-layer rigid vinyl flooring with click system							
Collection			Dawn 2 Dusk Royal Castle Moonwalk XL Woodlands					
Format			plank	herringbone	XL tile	XL plank		
Overall thickness	×	ISO 24337	·	<u> </u>		7 mm		
Wear layer	-	EN 429	6 mm 6 mm 7 mm 7 mm 					
Plank/tile size	<b></b>	ISO 24337	180 x 1220 mm	125 x 625 mm	609 x 609 mm	228 x 1828 mm		
	255	130 24337						
Construction				atented composite base with at				
Surface			embossed-in-register (EIR)	embossed-in-register (EIR)	light stone embossed	embossed-in-register (EIR)		
Finish			EpuShield (durable poluurethane coating with natural matt look)  pre-attached IXPE					
Underlay		EN 826, EN 1606	pass (CS $\ge$ 10 kPa, CC $\ge$ 2 kPa)					
Installation			floating (click system under license from Välinge)					
Click type (short side)			2,G	5 <u>G</u>	5 <u>G</u>	5 <u>G</u>		
Warranty			25 years residential, 10 years commercial					
Pieces per box			10	16	5	5		
Area per box			2,2 m2	1,25 m2	1,85 m2	2,08 m2		
Weight per box			21 kg	11,5 kg	21,5 kg	21 kg		
Fire resistance	0	EN 13501-1	Bfl-s1					
Formaldehyde emission	E1	EN 14041	E1					
Slip resistance	1	EN 13893 DIN 51130	DS R10					
Dimension stability	K 34	EN 23999	norm: ≦ 0,25% test result: ≦ 0,15%					
Curling	K 34	EN 23999	pass (≦ 2 mm)					
Openings	K 24	ISO 24337	pass (≦ 0,2 mm)					
Locking strength	7	ISO 10582	pass (long side $\ge 1 \text{ kN/m}$ , short side $\ge 1.5 \text{ kN/m}$ )					
Wear group classification	(A) (M)	ISO 10874	not applicable to herringbone 23: domestic heavy					
	# #	150 10074	33: commercial heavy					
Abrasion resistance		ISO 23338	pass (≧ 4000 cycles = AC4)					
Castor chair		ISO 4918	type W, 25000 cycles (no visible change)					
Impact resistance	Ę.	EN 13329	norm: ≧ 1600 mm test result: 2000 mm					
Residual indentation		EN 434	pass (≦ 0,2 mm)					
Stain resistance	<u>~</u> 3	EN 438	group 1 & 2: class 5 group 3: class 4					
UV resistance	<b>**</b>	ISO 105-B02	group 3. class 4  pass (≧ 6)					
Thermal conductivity	$\blacksquare$	EN 12667	0,117 W/mK (floor + underlay) 0,103 W/mK (floor + underlay)					
Thermal resistance	=	EN 12667	0,052 (m2K)/W (floor + underlay)					
Underfloor heating	=		suitable for underfloor heating under certain conditions					
Acoustic insulation	<u> </u>	EN ISO 717-2	ΔLw 21 dB (floor + underlay)					













is recommended to use cleaning and maintenance products from Dr. Schutz.



 $\label{eq:Multi-layer rigid vinyl flooring with click system can be installed over heating foils $$ from Heat Decor.$ 

# LUXURY VINYL FLOOR

#### PRODUCT SPECIFICATION

Floor type			glue down luxury vinyl flooring					
Collection			Dawn 2 Dusk GD	Royal Castle GD	Moonwalk GD	Woodlands GD		
Format			plank	herringbone / chevron	XL tile	XL plank		
Overall thickness	×	ISO 24337	2,5 mm					
Wear layer	×	EN 429	0,55 mm					
Plank/tile size	1	ISO 24337	188 x 1228 mm	132 x 660 mm	610 x 610 mm	235 x 1524 mm		
Construction			virgin PVC base material					
Surface			embossed-in-register (EIR)					
Finish			EpuShield (durable poluurethane coating with natural matt look)					
Installation		glue down						
Warranty			25 years residential, 10 years commercial, 5 years light industrial					
Pieces per box			16	18 / 20	10	10		
Area per box			3,69 m2	1,57 m2 / 1,74 m2	3,72 m2	3,58 m2		
Weight per box			18 kg	8 kg / 8,75 kg	18,5 kg	18 kg		
Fire resistance	100	EN 13501-1	Bfl-s1					
Formaldehyde emission	E1	EN 14041	E1					
Slip resistance	100	EN 13893 DIN 51130	DS R10					
Dimension stability	মিস এজ	EN 23999	pass (≦ 0,25%)					
Curling	মিস এত	EN 23999	pass (≦ 2mm)					
Openings	K M K M	ISO 24337	pass (≦ 0,2mm)					
Wear group classification ISO 10874 23: domestic heavy 33: commercial heavy					•			
			42: light industrial general					
Abrasion resistance		ISO 23338	group T					
Castor chair		EN 425	type W, 25000 cycles (no visible change)					
Residual indentation		EN 434	pass (≦ 0,2 mm)					
Stain resistance	1	EN 438	group 1 i 2: class 5 group 3: class 4					
UV resistance	3	ISO 105-B02	pass (≧ 6)					
Thermal conductivity	$\equiv$	EN 12524	0,25 W/mK					
Thermal resistance	$\equiv$	EN 12524	0,012 (m2K)/W					
Underfloor heating	$\equiv$		suitable for underfloor heating under certain conditions					
Acoustic insulation	١	EN ISO 717-2	ΔLw 3 dB					











It is recommended to use cleaning and maintenance products from Dr. Schutz.



Glue down luxury vinyl flooring with click system can be installed over heating foils from Heat Decor.

For more details about warranty and installation, please visit our website or contact one of our sales representatives. Alterations to product composition and materials used can be made to improve the quality.

EPUFLOORING Sp. z o.o.
Company address: Kopcinskiego 77, 90-033 Lodz, Poland
Warehouse address: Ossendowskiego 3B, 90-001 Lodz, Poland
help@epuflooring.com www.vinyltechlab.pl



# EPUFLOORING SP. Z O.O.

Kopcińskiego 77, 90-033 Łódź, Poland help@epuflooring.com www.vinyltechlab.pl

- (f) MinylTechLab
- © @vinyltechlab
- (in) /epufloor